




SUPER STAGE MOLLETON NOIR 018220L


Tissu 100% coton – Ignifugé B1– 500gr/m² –
Noir ou Ecreu



Rating according to ISO 11654:
Weighted sound absorption coefficient
 $\alpha_w = 0.60 (H)$
Sound absorption class: C

Rating according to ASTM C423:
Noise Reduction Coefficient NRC = 0.60
Sound Absorption Average SAA = 0.57

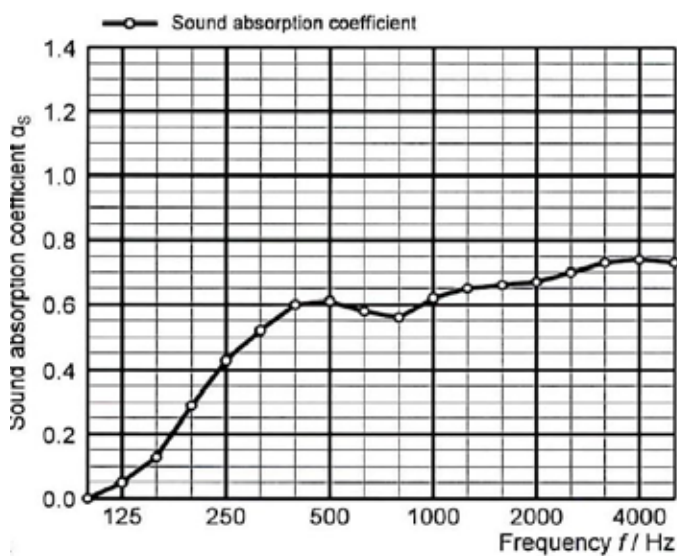



SUPER STAGE MOLLETON NOIR 018220L

 Conditionnement	Rouleau de 3m x 30m	 Impression	Non
 Vente à la coupe	Non	 Confections	Oui : œillets – ourlet-velcro
 Épaisseur	4 mm	 Coloris	2 coloris
 Classement Feu	Ignifugé B1	 Technique de pose	Pose tendue a 2cm du mur de pose.
 Types d'application	Éphémère	 Disponibilité	Sur commande



LIVRAISON
SOUS 10 JOURS



POSE RAPIDE
POUR ÉVÉNEMENTS



100%
RECYCLABLE